



700915/USW  
Brushed Nickel



700910/USW  
Chrome



700916/USW  
Matte Black



700912/USW  
Matte Graphite



700917/USW  
Matte Black/  
Rose Gold



700918/USW  
Matte Black/  
Brushed Gold

# Atik

## Semi-Pro Pull-Down Faucet

### Specifications

Flexible soft-touch hose

Practical cold-start function for energy saving

Pull-down spout with 2 sprays

Easy assembly due to central fixing nut


Flexible metal connection hoses approx. 39.37"

Connection type: High pressure

Swivel range: 360°

Flow Rate: 1.75 gpm

Hole count: 1 to 3 (base plate available separately)

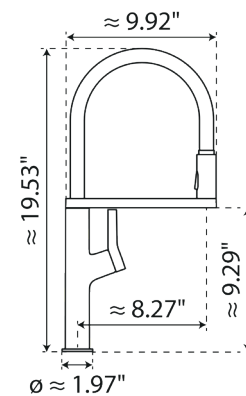

### Codes & Standards

- California Energy Commission (CEC)
- Department of Energy (DOE)
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- ADA Compliance
- NSF/ANSI 372
- MASS