




Polis


Pull-Out Faucet

Specifications

| |
|--|
| Practical cold-start function for energy saving |
| Pull-out spout with 2 sprays |
| Easy assembly due to central fixing nut |
| Flexible metal connection hoses approx. 39.37" |
| Connection type: High pressure |
| Swivel range: 360° |
| Flow Rate: 1.75 gpm |
| Hole count: 1 to 3 (base plate available seperately) |

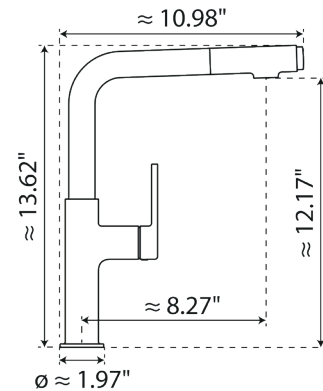

LEAD FREE
NSF/ANSI/CAN 61



Codes & Standards

- California Energy Commission (CEC)
- Department of Energy (DOE)
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- ADA Compliance
- NSF/ANSI 372
- MASS